



A Red Light Running (RLR) Photo Enforcement System was installed at the intersection of US Rte. 20 (Lake Street) at Gary Avenue on August 29, 2008 (westbound) and on February 19, 2009 (eastbound), after finding limited success with other attempted measures to promote safer driving and improve compliance with traffic laws. As a condition of use, both Illinois law and the Illinois Department of Transportation require periodic statistical analyses/evaluations be conducted.

Specifically, the Illinois Compiled Statutes, 625 ILCS 5/11-208.6 Automated Traffic Law Enforcement System states:

*(k-7) A municipality or county operating an automated traffic law enforcement system shall conduct a statistical analysis to assess the safety impact of each automated traffic law enforcement system at an intersection following installation of the system. The statistical analysis shall be based upon the best available crash traffic and other data, and shall cover a period of time before and after installation of the system sufficient to provide a statistically valid comparison of safety impact. The statistical analysis shall be consistent with professional judgment and acceptable industry practice. The statistical analysis also shall be consistent with the data required for valid comparisons of before and after conditions and shall be conducted within a reasonable period following the installation of the automated traffic law enforcement system. The statistical analysis required by this subsection (k-7) shall be made available to the public and shall be published on the website of the municipality or county. If the statistical analysis for the 36-month period following installation of the system indicates that there has been an increase in the rate of accidents at the approach to the intersection monitored by the system, the municipality or county shall undertake additional studies to determine the cause and severity of the accidents, and may take any action that it determines is necessary or appropriate to reduce the number or severity of the accidents at that intersection.*

The Illinois Department of Transportation Safety Engineering Policy Memorandum, Safety 2-13, Automated Traffic Law Enforcement Systems: Red Light Running (RLR) Camera Enforcement Systems and Automated Railroad Grade Crossing (RGC) Enforcement Systems states:

Follow Up Evaluation

*An Evaluation Report shall be prepared by the Permit Applicant one year after the installation and shall be prepared every three years thereafter. The Evaluation Report shall include the following:*

- *Intersection location(s);*
- *Date of implementation;*
- *RLR Camera System manufacturer and contractor name;*
- *Crash data specific to RLR location(s) for the three (3) year period prior to and for the period post RLR Camera installation;*
- *An analysis of the crash data, including a summary of any increase in crash types;*
- *Signal timing and other settings before and after RLR Camera installation;*
- *Traffic volumes before and after RLR Camera System installation; and,*
- *Summary of adjudication experience and results.*

The following analysis/evaluation was performed through 2017.

*Calendar year 2018 was not included, as the Illinois Department of Transportation (IDOT) has not yet completed collecting all data. The statistical analysis will be updated annually, as IDOT collected data becomes available for release.*



**US Rte. 20 (Lake St.) at Gary Ave.**  
**Roselle, IL**

- RLR Photo Enforcement System monitors violations occurring on the eastbound and westbound approaches of the intersection
- RLR Photo Enforcement System installed: August 29, 2008 (westbound) and February 19, 2009 (eastbound)





**US Rte. 20 (Lake St.) at Gary Ave. - Northbound Approach**



**US Rte. 20 (Lake St.) at Gary Ave. - Southbound Approach**





**US Rte. 20 (Lake St.) at Gary Ave. - Eastbound Approach**



**US Rte. 20 (Lake St.) at Gary Ave. - Westbound Approach**






## Average Daily Traffic Cont'd

Data was obtained from the Illinois Department of Transportation's website [www.gettingaroundillinois.com](http://www.gettingaroundillinois.com).

US Rte. 20 (Lake St.) at Gary Ave. (Northbound)

- 40,500 (2008)
- 33,200 (2012)
- 28,000 (2016)

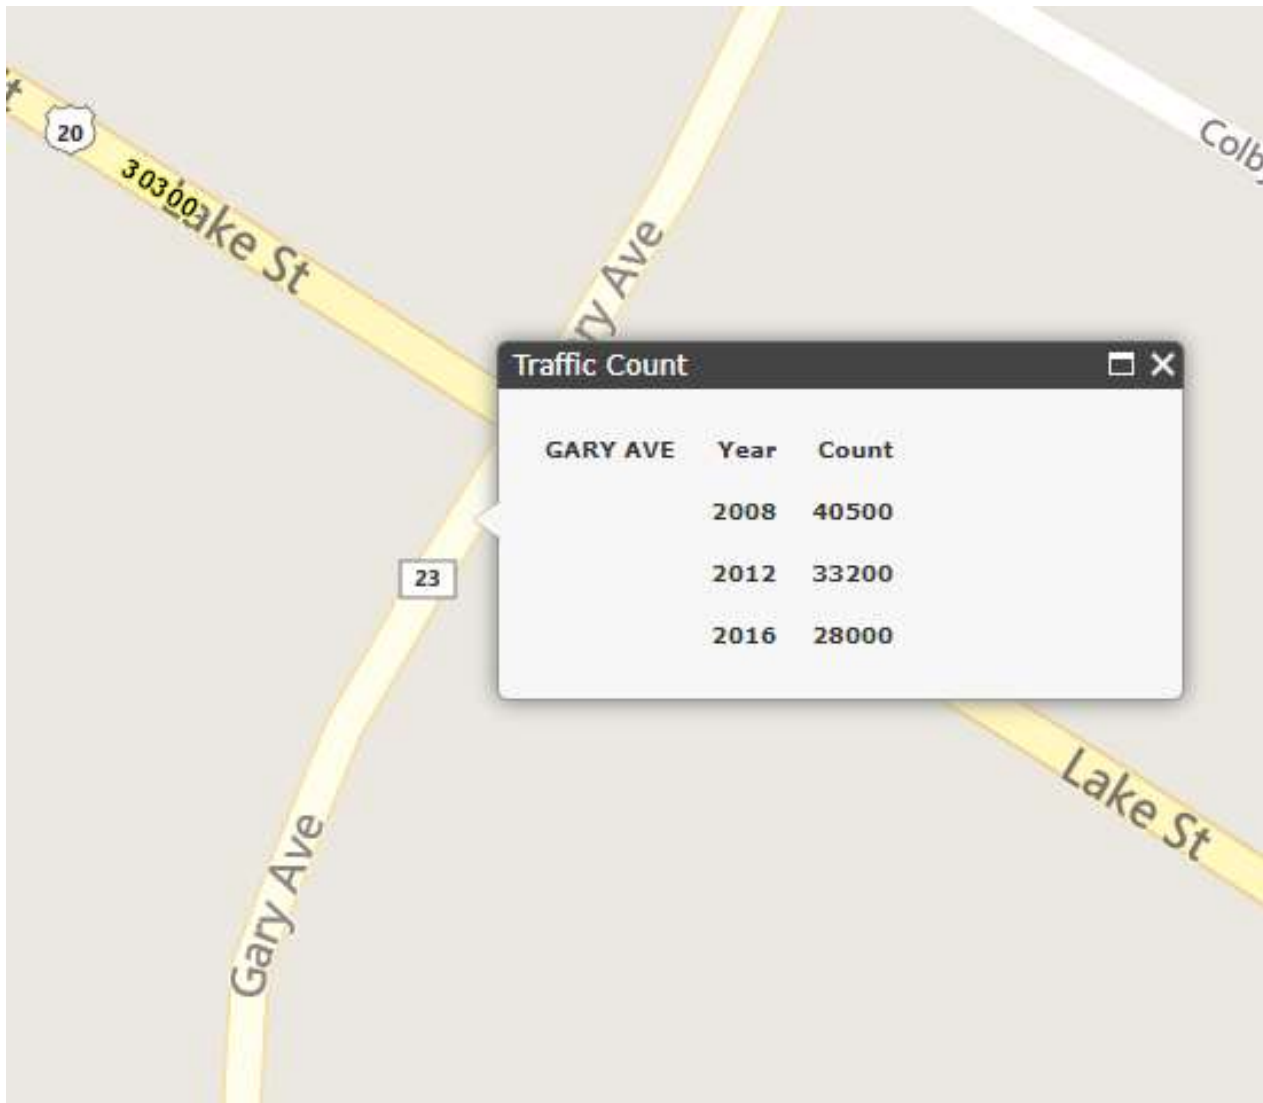




## Average Daily Traffic Cont'd

Data was obtained from the Illinois Department of Transportation's website [www.gettingaroundillinois.com](http://www.gettingaroundillinois.com).

US Rte. 20 (Lake St.) at Gary Ave. (Southbound)

- 21,500 (2008)
- 22,000 (2012)

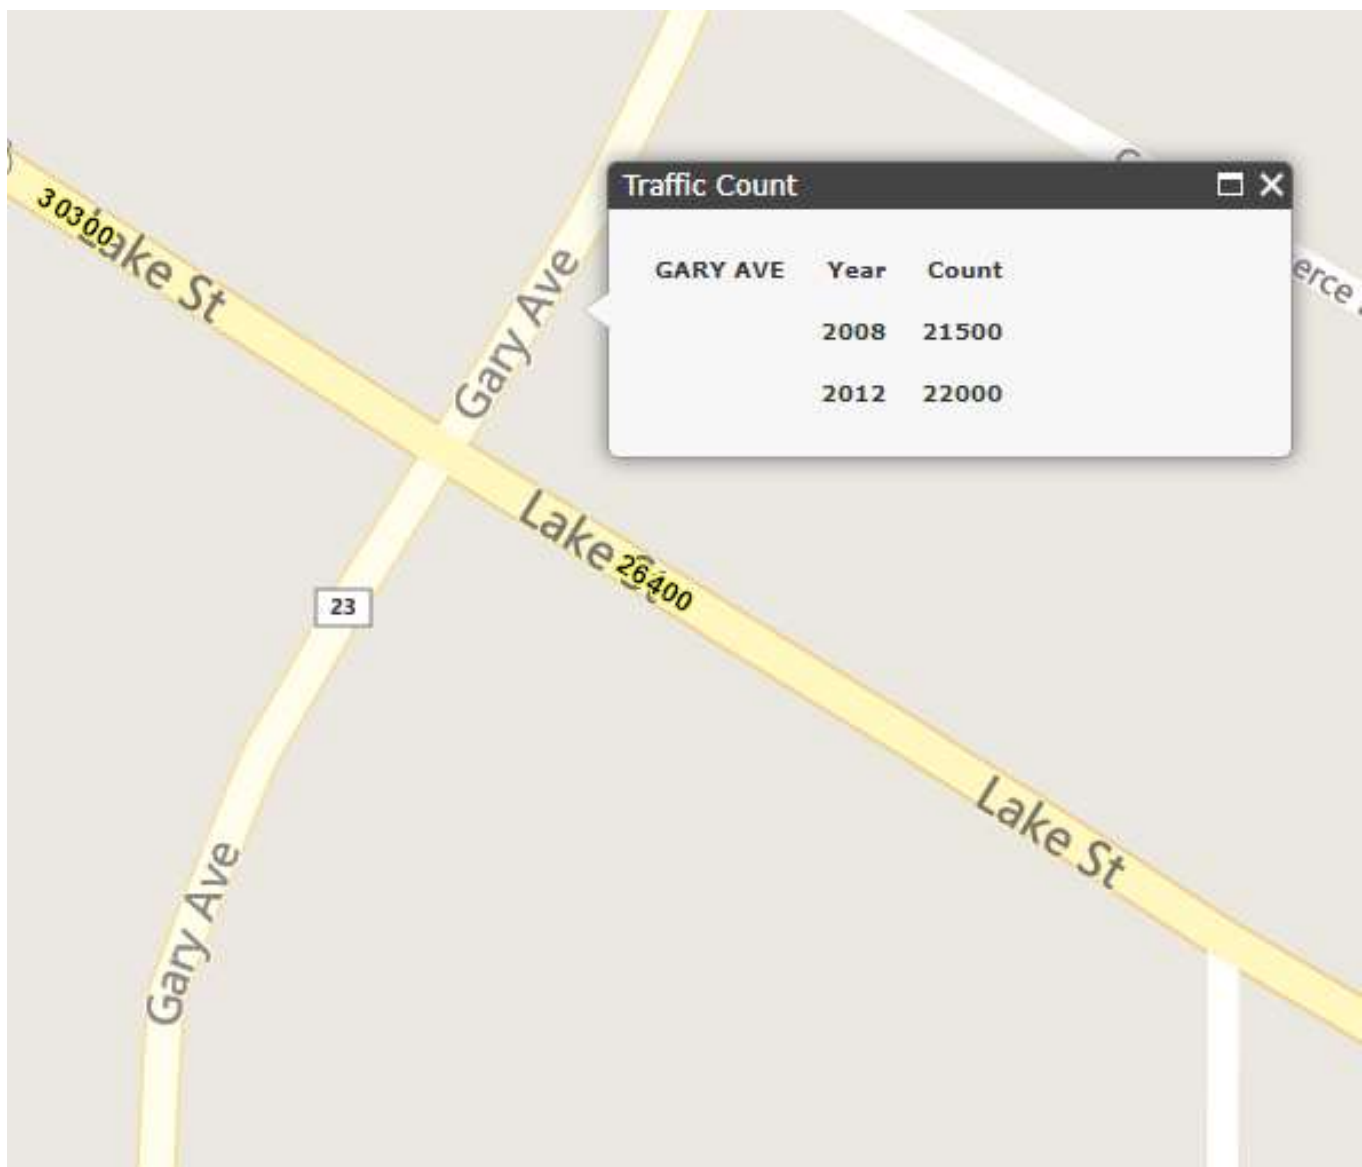




## Average Daily Traffic

Data was obtained from the Illinois Department of Transportation's website [www.gettingaroundillinois.com](http://www.gettingaroundillinois.com).

US Rte. 20 (Lake St.) at Gary Ave. (Eastbound)

- 30,200 (2009)
- 31,900 (2011)
- 32,100 (2013)
- 30,000 (2015)
- 30,300 (2017)

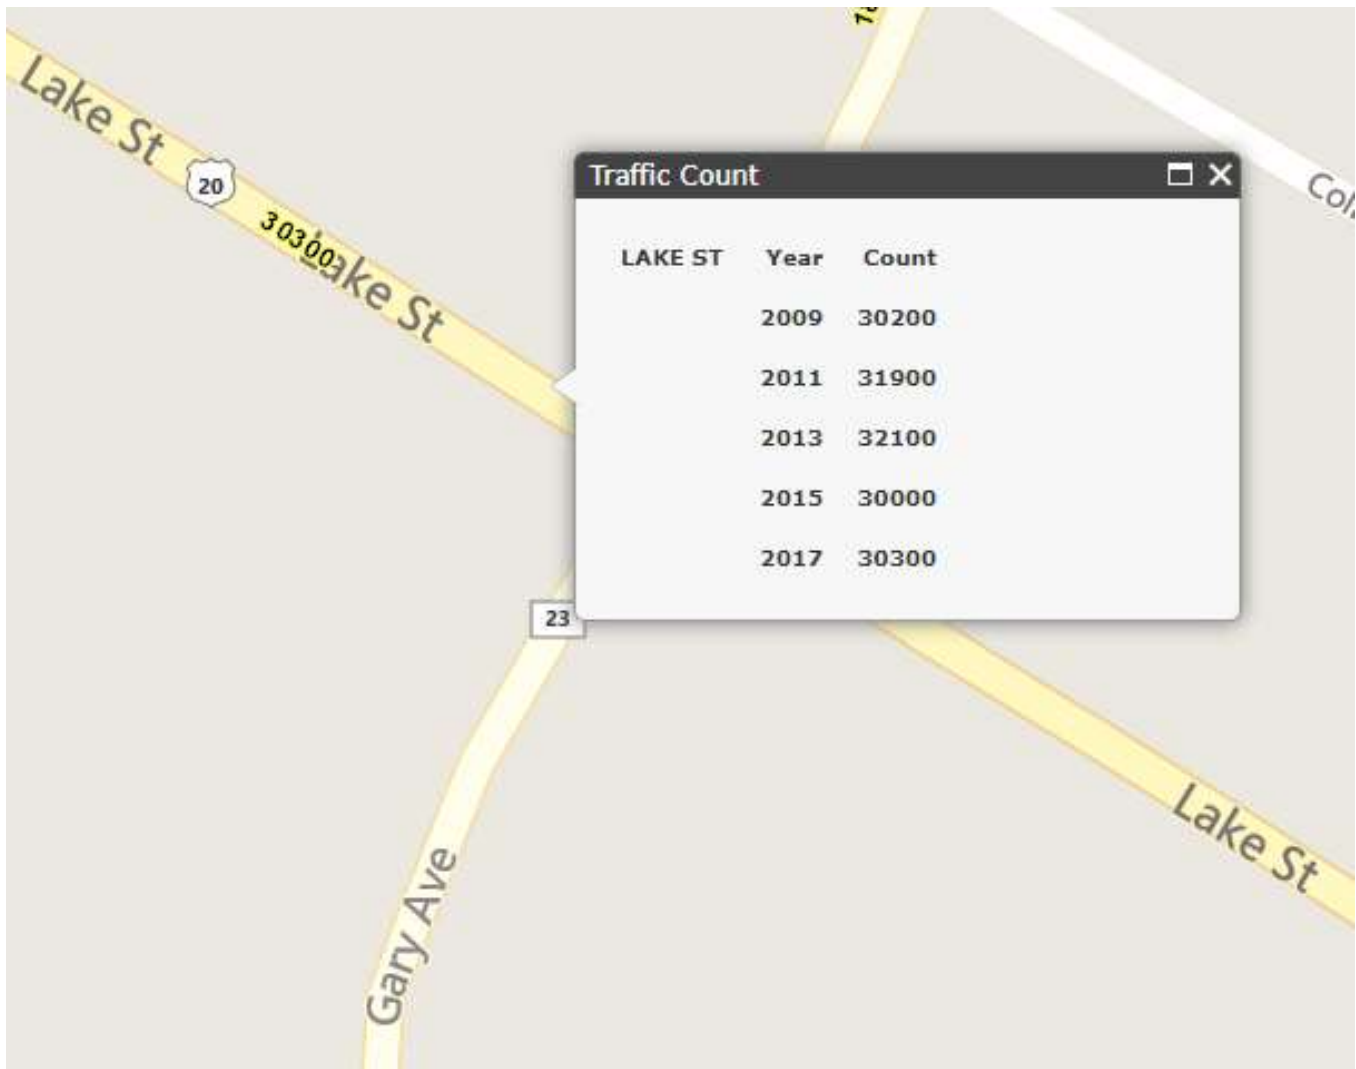




## Average Daily Traffic Cont'd

Data was obtained from the Illinois Department of Transportation's website [www.gettingaroundillinois.com](http://www.gettingaroundillinois.com).

US Rte. 20 (Lake St.) at Gary Ave. (Westbound)

- 22,600 (2009)
- 25,300 (2011)
- 27,400 (2013)
- 24,600 (2015)
- 26,400 (2017)

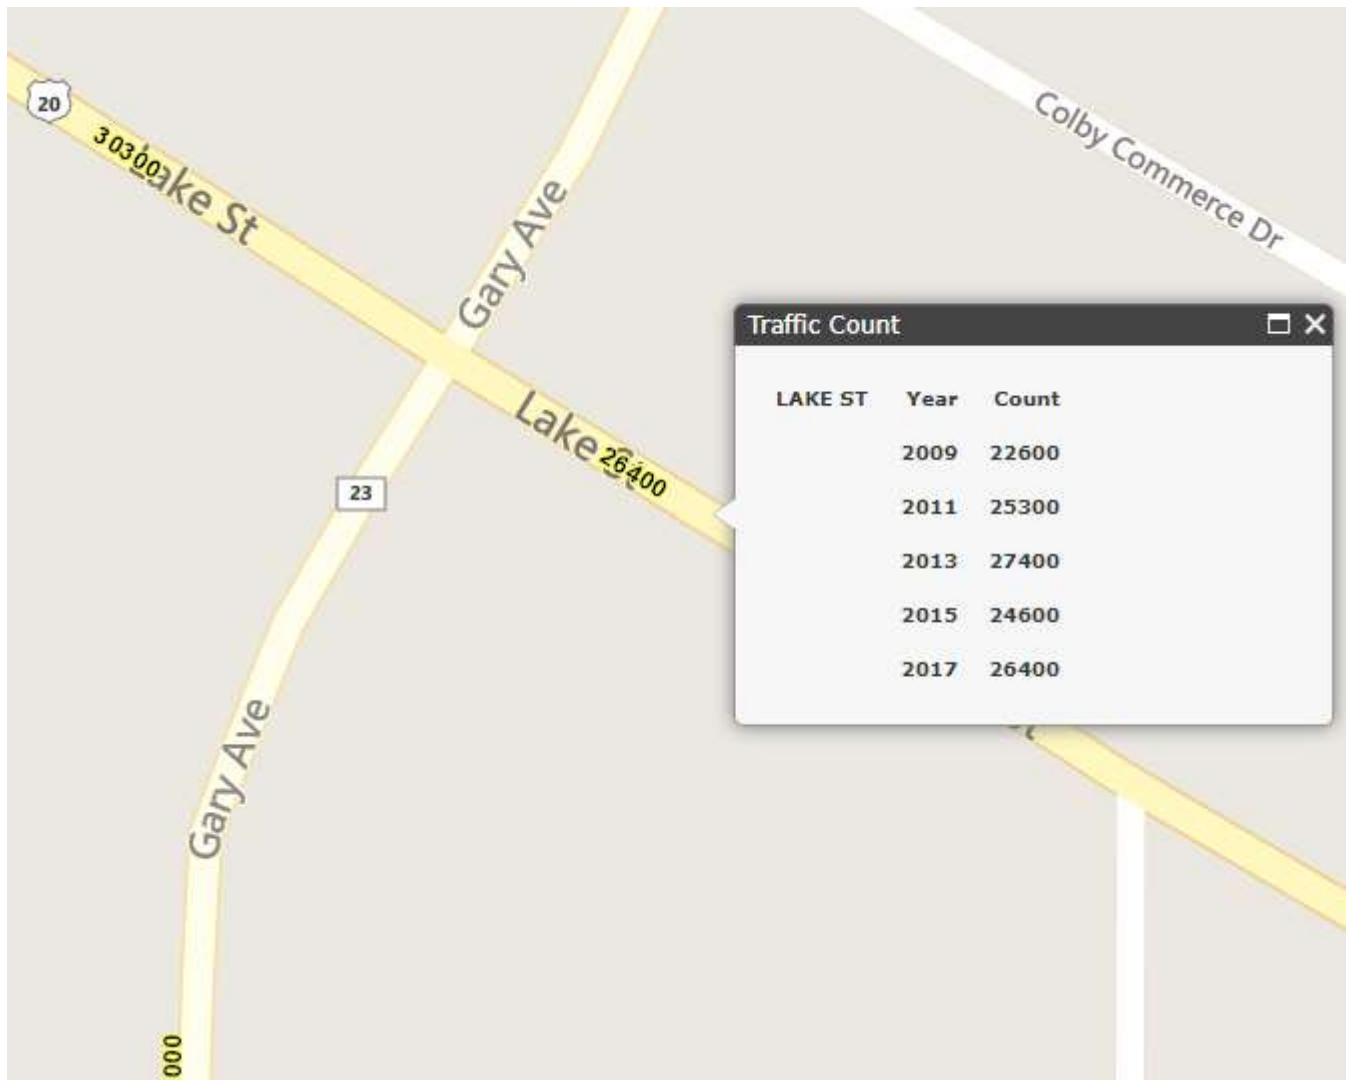





## Adjudication Experience

RLR camera violations are contested and adjudicated through an administrative hearing conducted each month. Adjudication data for the Village's Automated Enforcement Program is shown below in Table 1.

<b>VILLAGE OF ROSELLE ADJUDICATION FOR AUTOMATED PHOTO ENFORCEMENT PROGRAM*</b>		
<b>YEAR /TOTALS</b>	<b>LIABLE</b>	<b>NOT LIABLE</b>
2008	131	18
2009	520	44
2010	567	73
2011	280	84
2012	253	65
2013	326	75
2014	204	68
2015	188	47
2016	142	15
2017	113	16
2018	89	16
2019**	51	2
<b>TOTAL:</b>	<b>2,864</b>	<b>523</b>

\*Adjudication totals include contested violations for entire program (all RLR cameras).

\*\*2019 totals through October 2019.

Table 1

The high-quality video footage and photographic evidence produced by the enforcement system is a contributing factor in a majority of the contested RLR violations being upheld by the Hearing Officer. The police officers assigned to review and approve/reject potential violations are vigilant in applying the same officer discretion and criteria they would if issuing an in-person citation, resulting in only highly prosecutable violations being mailed out.



## Crash History and Analysis

- Table 2 includes crash data obtained from the Illinois Department of Transportation, detailing angle, turning, rear-end, and other type crashes occurring at the intersection pre/post RLR Photo Enforcement System installation.

### ALL INTERSECTION APPROACHES

	Crashes								Total
	Rear-End (% of Total)		Angle (% of Total)		Turning (% of Total)		Other (% of Total)		
2005	13	68.4%	0	0.0%	5	26.3%	1	5.3%	19
2006	23	62.2%	2	5.4%	11	29.7%	1	2.7%	37
2007	14	41.2%	5	14.7%	13	38.2%	2	5.9%	34
Total	50	55.6%	7	7.8%	29	32.2%	4	4.4%	90
2005-2007 Average	16.7		2.3		9.7		1.3		30.0

RLR Camera Installation: August 29, 2008 (Westbound)									
2008	10	41.7%	0	0.0%	9	37.5%	5	20.8%	24
RLR Camera Installation: February 19, 2009 (Eastbound)									
2009	15	62.5%	1	4.2%	6	25.0%	2	8.3%	24
2010	16	57.1%	1	3.6%	11	39.3%	0	0.0%	28
2011	14	51.9%	0	0.0%	12	44.4%	1	3.7%	27
2012	21	75.0%	1	3.6%	5	17.8%	1	3.6%	28
2013	12	80.0%	0	0.0%	3	20.0%	0	0.0%	15
2014	17	58.6%	4	13.8%	7	24.1%	1	3.4%	29
2015	20	64.5%	0	0.0%	10	32.3%	1	3.2%	31
2016	12	48.0%	3	12.0%	8	32.0%	2	8.0%	25
2017	10	62.5%	0	0.0%	4	25.0%	2	12.5%	16
Total	122	61.3%	9	4.5%	60	30.1%	8	4.0%	199
2010-2017 Average	15.2		1.1		7.5		1.0		24.9

- Other indicates the following: Pedestrian, Pedal Cyclist, Fixed Object, Sideswipe, Head-On and Unknown

Table 2

DISCLAIMER: The motor vehicle crash data referenced herein was provided by the Illinois Department of Transportation, based upon information derived from multiple sources. Any conclusions drawn from analysis of the aforementioned data are the sole responsibility of the data recipient(s). Additionally, for coding years 2015 to present, the Bureau of Data Collection uses the exact latitude/longitude supplied by the investigating law enforcement agency to locate crashes. Therefore, location data may vary in prior years, since the data prior to 2015 was physically located by bureau personnel. Given the subjective nature of the reporting process, the modifications in the incident locating protocols and the changes to the crash reporting thresholds effective 2009, the Village of Roselle acknowledges the potential for discrepancies in the final conclusions drawn.



**Crash History and Analysis (continued)**

- Table 3 includes crash data obtained from the Illinois Department of Transportation, detailing angle, turning, rear-end, and other-type crashes occurring at the intersection on the eastbound/westbound approaches only, pre/post RLR Photo Enforcement System installation.

**EASTBOUND/WESTBOUND APPROACHES ONLY  
 (PHOTO ENFORCED APPROACHES)**

	Crashes								
	Rear-End (% of Total)		Angle (% of Total)		Turning (% of Total)		Other (% of Total)		Total
2005	5	55.5%	0	0.0%	3	33.3%	1	11.1%	9
2006	11	50.0%	2	9.1%	8	36.4%	1	4.5%	22
2007	9	34.6%	5	19.2%	12	46.1%	0	0.0%	26
Total	25	43.8%	7	12.3%	23	40.3%	2	3.5%	57
2005-2007 Average	8.3		2.3		7.7		0.7		19.0

RLR Camera Installation: August 29, 2008									
2008	5	38.5%	0	0.0%	8	61.5%	0	0.0%	13
RLR Camera Installation: February 19, 2009									
2009	8	53.3%	1	6.7%	5	33.3%	1	6.7%	15
2010	6	33.3%	1	5.5%	11	61.1%	0	0.0%	18
2011	8	47.0%	0	0.0%	9	52.9%	0	0.0%	17
2012	13	65.0%	1	5.0%	5	25.0%	1	5.0%	20
2013	7	77.8%	0	0.0%	2	22.2%	0	0.0%	9
2014	13	56.5%	4	17.4%	6	26.1%	0	0.0%	23
2015	12	66.7%	0	0.0%	5	27.8%	1	5.5%	18
2016	6	42.8%	2	14.3%	5	35.7%	1	7.1%	14
2017	5	45.4%	0	0.0%	4	36.4%	2	18.2%	11
Total	70	53.8%	8	6.1%	47	36.1%	5	3.8%	130
2010-2017 Average	8.7		1.0		5.9		0.6		16.2

- Other indicates the following: Pedestrian, Pedal Cyclist, Fixed Object, Sideswipe, Head-On and Unknown

Table 3

DISCLAIMER: The motor vehicle crash data referenced herein was provided by the Illinois Department of Transportation, based upon information derived from multiple sources. Any conclusions drawn from analysis of the aforementioned data are the sole responsibility of the data recipient(s). Additionally, for coding years 2015 to present, the Bureau of Data Collection uses the exact latitude/longitude supplied by the investigating law enforcement agency to locate crashes. Therefore, location data may vary in prior years, since the data prior to 2015 was physically located by bureau personnel. Given the subjective nature of the reporting process, the modifications in the incident locating protocols and the changes to the crash reporting thresholds effective 2009, the Village of Roselle acknowledges the potential for discrepancies in the final conclusions drawn.



Comparison of annual averages displays a 17.0% decrease in the total number of crashes at the intersection for all approaches, a 14.7% decrease on the eastbound/westbound (photo enforced) approaches post-camera installation.

The US Department of Transportation Project Development and Design Manual states that turning, angle or head-on crashes have a number of probable crash causes, to include:

- Large volumes of left /right turns
- Large total intersection volume
- Excessive speed on approaches
- Inadequate traffic control devices
- Poor visibility of signals

While red light cameras cannot truly decrease the volume of cars entering the intersection, speed and proximity of vehicles entering an intersection or the amount of turning traffic volume, red light cameras and red-light camera photo enforcement warning signs have the ability to reduce traffic crashes and improve compliance with traffic control devices.

Analysis of all available data indicates the Village's RLR Photo Enforcement Program has made a significant impact on traffic safety at this intersection and that continued enforcement will be beneficial in the years to come.